




## Discover our range of **standard ZFG multimode fibers**:




### Specifications

Operating wavelength	0.3 – 4.5 $\mu\text{m}$
Typical optical loss @ 2.5 $\mu\text{m}$	< 20 dB/km
Fresnel loss (backwards reflection)	4% per face (air)
Coating material	UV curable acrylate
Operating temperature	- 180 to 150 °C

Standard fiber	Core/clad diameter	Numerical aperture	Short term bend radius	Long term bend radius	Price/m
ZFG MM (0.15) 90/150	90/150 $\mu\text{m}$	0.15	$\geq 15$ mm	$\geq 45$ mm	25 €
ZFG MM (0.20) 100/160	100/160 $\mu\text{m}$	0.20	$\geq 15$ mm	$\geq 45$ mm	50 €
ZFG MM (0.20) 200/260	200/260 $\mu\text{m}$	0.20	$\geq 25$ mm	$\geq 75$ mm	70 €
ZFG MM (0.20) 300/360	300/360 $\mu\text{m}$	0.20	$\geq 35$ mm	$\geq 100$ mm	140 €
ZFG MM (0.20) 400/460	400/460 $\mu\text{m}$	0.20	$\geq 45$ mm	$\geq 120$ mm	220 €
ZFG MM (0.20) 600/680	600/680 $\mu\text{m}$	0.20	$\geq 70$ mm	$\geq 150$ mm	480 €

All our fibers are available as **fiber patch cables** or **fiber bundles**  
LVF proposes also **IR screened fibers** and **endcaps solutions**

### Typical attenuation

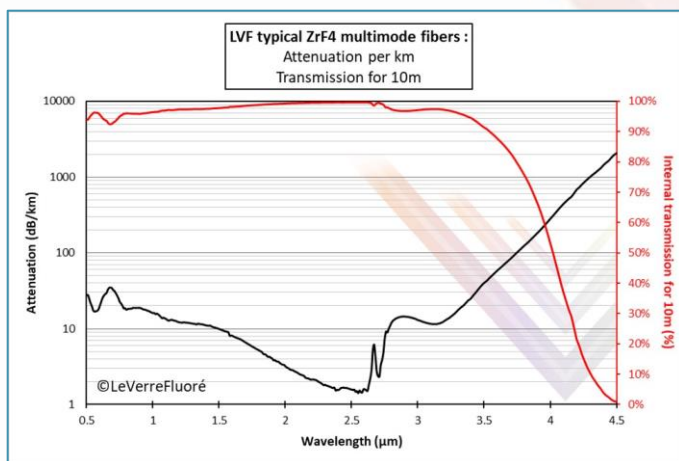

### CUSTOMIZE your own fiber



- Custom NA (from 0.12 to 0.30)
- Custom core/cladding size (up to 1000  $\mu\text{m}$  core diameter)

